


Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

Drawing No.	Order No.	Description	Quantity
1	V3379	WS1 FTG Bypass Plas Male	2

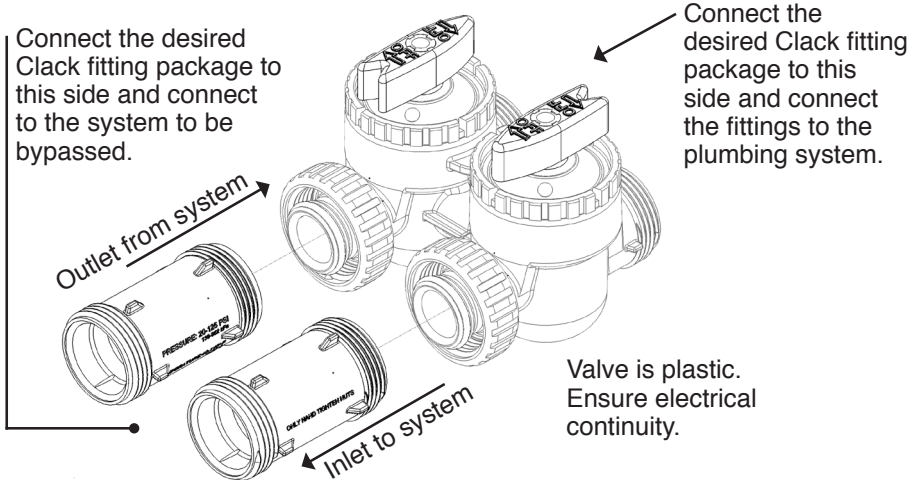


Form No. V3115-23 • 9/21/2021

Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

Drawing No.	Order No.	Description	Quantity
1	V3379	WS1 FTG Bypass Plas Male	2

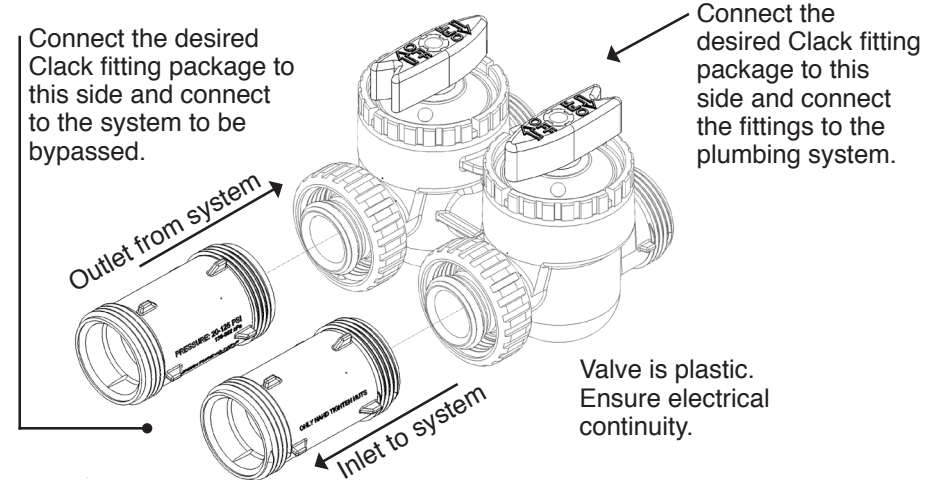


Form No. V3115-23 • 9/21/2021

Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

Drawing No.	Order No.	Description	Quantity
1	V3379	WS1 FTG Bypass Plas Male	2

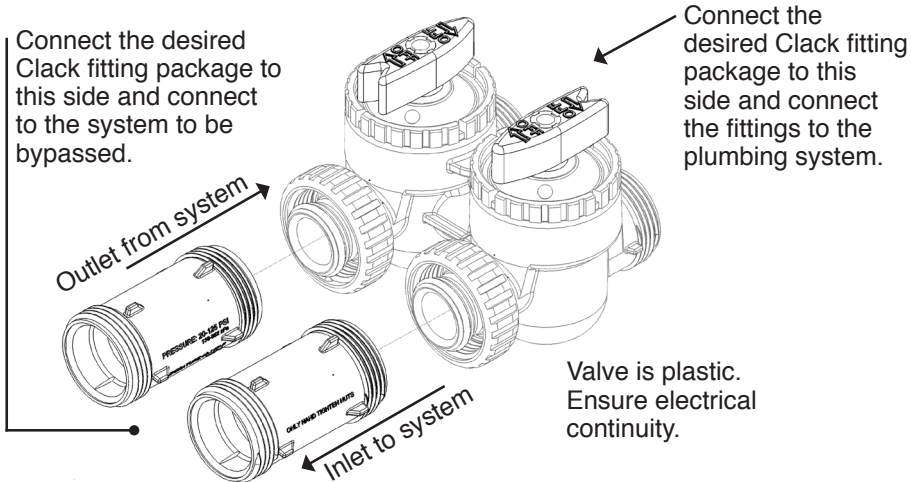


Form No. V3115-23 • 9/21/2021

Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

Drawing No.	Order No.	Description	Quantity
1	V3379	WS1 FTG Bypass Plas Male	2

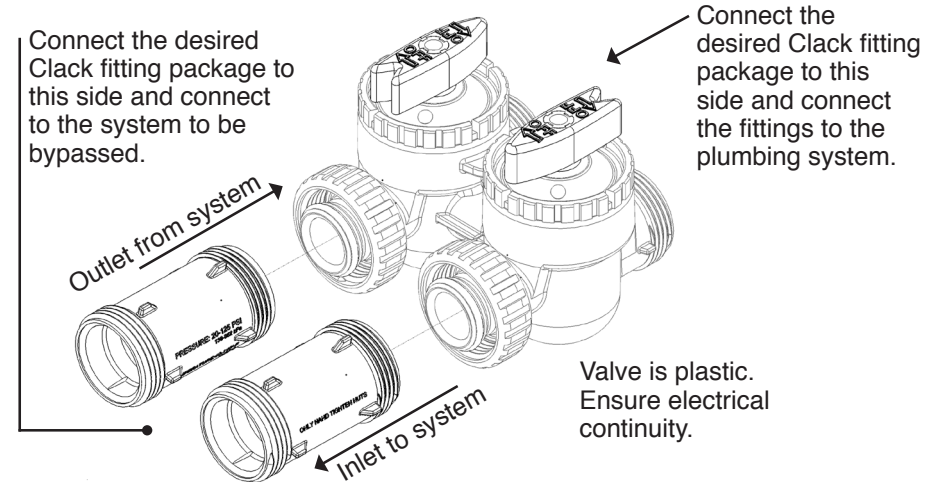

Form No. V3115-23 • 9/21/2021


Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

HYDROCARBONS SUCH AS VASELINE®, PETROLEUM JELLY, KEROSENE, BENZENE, GASOLINE, ETC., WILL DAMAGE PRODUCTS THAT CONTAIN O-RINGS OR PLASTIC COMPONENTS. EXPOSURE TO SUCH HYDROCARBONS MAY CAUSE THE PRODUCTS TO LEAK. DO NOT USE CLACK CONTROL VALVE PRODUCT(S) ON WATER SUPPLIES THAT CONTAIN HYDROCARBONS SUCH AS KEROSENE, BENZENE, GASOLINE, ETC.

Fitting Installation Instructions:

- Install only on cold water supplies and 125 psi or less.
- Installation fittings are designed to accommodate minor plumbing misalignments, but are not designed to support the weight of a system or the plumbing.
- Follow the detailed instructions for the particular adapter that you select to connect to the inline adapter fittings.
- Hand tighten the nut only.
- Operating Pressures 20-125 psi / 138-862 kPa
- Temperature Ranges 40-110° F / 4-43° C
- Valve is plastic. Ensure electrical continuity.

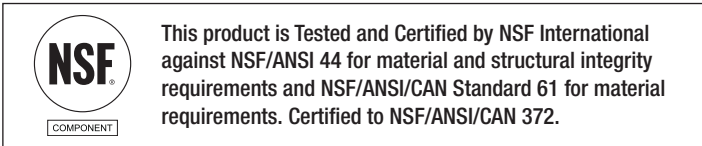

Form No. V3115-23 • 9/21/2021


Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

HYDROCARBONS SUCH AS VASELINE®, PETROLEUM JELLY, KEROSENE, BENZENE, GASOLINE, ETC., WILL DAMAGE PRODUCTS THAT CONTAIN O-RINGS OR PLASTIC COMPONENTS. EXPOSURE TO SUCH HYDROCARBONS MAY CAUSE THE PRODUCTS TO LEAK. DO NOT USE CLACK CONTROL VALVE PRODUCT(S) ON WATER SUPPLIES THAT CONTAIN HYDROCARBONS SUCH AS KEROSENE, BENZENE, GASOLINE, ETC.

Fitting Installation Instructions:

- Install only on cold water supplies and 125 psi or less.
- Installation fittings are designed to accommodate minor plumbing misalignments, but are not designed to support the weight of a system or the plumbing.
- Follow the detailed instructions for the particular adapter that you select to connect to the inline adapter fittings.
- Hand tighten the nut only.
- Operating Pressures 20-125 psi / 138-862 kPa
- Temperature Ranges 40-110° F / 4-43° C
- Valve is plastic. Ensure electrical continuity.

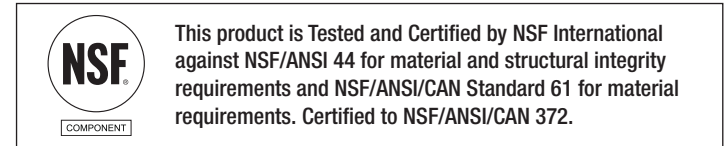

Form No. V3115-23 • 9/21/2021


Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

HYDROCARBONS SUCH AS VASELINE®, PETROLEUM JELLY, KEROSENE, BENZENE, GASOLINE, ETC., WILL DAMAGE PRODUCTS THAT CONTAIN O-RINGS OR PLASTIC COMPONENTS. EXPOSURE TO SUCH HYDROCARBONS MAY CAUSE THE PRODUCTS TO LEAK. DO NOT USE CLACK CONTROL VALVE PRODUCT(S) ON WATER SUPPLIES THAT CONTAIN HYDROCARBONS SUCH AS KEROSENE, BENZENE, GASOLINE, ETC.

Fitting Installation Instructions:

- Install only on cold water supplies and 125 psi or less.
- Installation fittings are designed to accommodate minor plumbing misalignments, but are not designed to support the weight of a system or the plumbing.
- Follow the detailed instructions for the particular adapter that you select to connect to the inline adapter fittings.
- Hand tighten the nut only.
- Operating Pressures 20-125 psi / 138-862 kPa
- Temperature Ranges 40-110° F / 4-43° C
- Valve is plastic. Ensure electrical continuity.

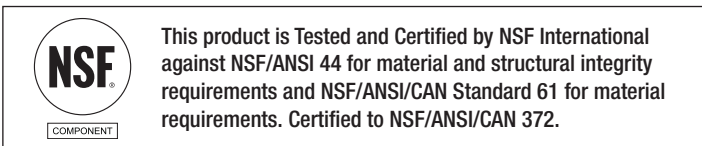

Form No. V3115-23 • 9/21/2021


Clack Order No. V3467

Description: WS1 Bypass Inline Adapter Fittings

HYDROCARBONS SUCH AS VASELINE®, PETROLEUM JELLY, KEROSENE, BENZENE, GASOLINE, ETC., WILL DAMAGE PRODUCTS THAT CONTAIN O-RINGS OR PLASTIC COMPONENTS. EXPOSURE TO SUCH HYDROCARBONS MAY CAUSE THE PRODUCTS TO LEAK. DO NOT USE CLACK CONTROL VALVE PRODUCT(S) ON WATER SUPPLIES THAT CONTAIN HYDROCARBONS SUCH AS KEROSENE, BENZENE, GASOLINE, ETC.

Fitting Installation Instructions:

- Install only on cold water supplies and 125 psi or less.
- Installation fittings are designed to accommodate minor plumbing misalignments, but are not designed to support the weight of a system or the plumbing.
- Follow the detailed instructions for the particular adapter that you select to connect to the inline adapter fittings.
- Hand tighten the nut only.
- Operating Pressures 20-125 psi / 138-862 kPa
- Temperature Ranges 40-110° F / 4-43° C
- Valve is plastic. Ensure electrical continuity.

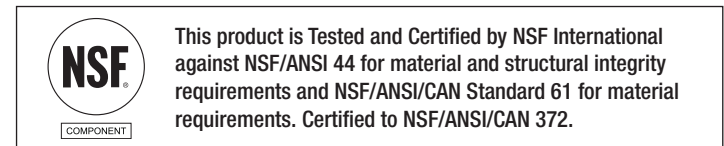

Form No. V3115-23 • 9/21/2021